



SPECIFICATIONS

Shower Mixing Valve 1/2", Sparco Anti-Scald
LEAD FREE THERMOSTATIC POINT OF USE MIXING VALVE

GENERAL INFORMATION

Valve Type: Anti-Scald Mixing Valve
Body Material: Lead Free Solid Brass

CONNECTIONS & DIMENSIONS

Connection Inlet: 1/2" MPT
Connection Outlet: 1/2" MPT
Valve Body Length: 5" (127 mm)
Valve Body Height: 5"

PRODUCT FEATURES


Time Adjustable: No
Temperature Adjustable: Yes
Working Temperature Range: 90 Degrees F - 140 Degrees F
Anti-Scald Protection: Yes
Easy Disassembly for cleaning and field repair
Effectively Increases Water Heater Output by up to 50%
Lead Free and Corrosion Resistant

WHAT'S INCLUDED

Mixing Valve
Vandal Resistant Cap
Buna O-Rings

PRESSURE DROP

5	10	20	30	40	50	PSI
.35	.70	1.4	2.1	2.8	3.4	BAR
3.5	5.5	7.5	9.5	10.5	12	GPM
13	21	28	36	40	45	l/min

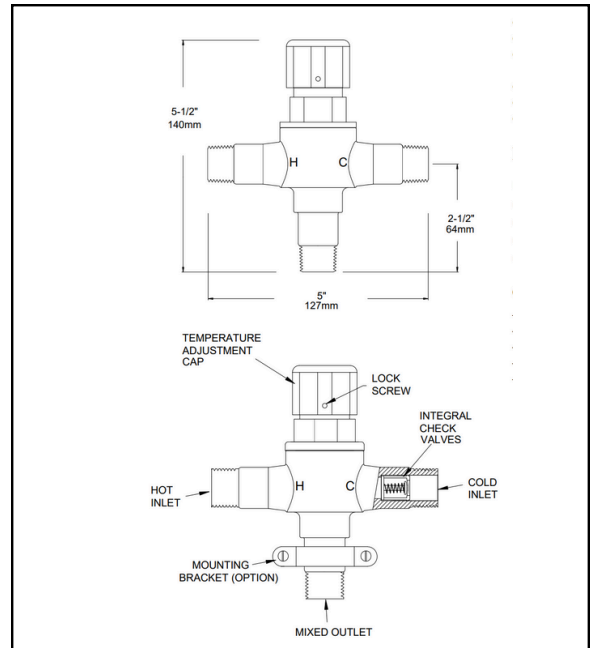

90-140 °F



0.5-6 bar
2-4 bar (Recommended)



.95 l/min
Maximum Pressure: 125 PSI (8.6 BAR)



1/2" MPT



ASSE 1070, ASSE 1017
CSA Approved
IAPMO Approved



Certified to meet Low Lead requirements
of wetted surface area containing
less than 0.25% lead by weight