

## **SPECIFICATIONS**

Push Button Shower Panels 86mm (Time Adjustable Only)

Concealed self-closing mixer

#### **GENERAL INFORMATION**

Valve Type: Self Closing Metering Valve Valve Activation: Manual Push Button Valve Installation Type: Concealed Wall Mount Body Material: Lead Free Solid Brass

Finish Type: Stainless Steel

### CONNECTIONS & DIMENSIONS

Connection Inlet: 1/2" MPT Connection Outlet: 1/2" MPT Panel Width: 5.3" (135mm) Panel Height: 41.3" (1050mm)

#### PRODUCT FEATURES

Time Adjustable: No, 30 Seconds Temperature Adjustable: No

Working Temperature Range: 40 Degrees F - 160 Degrees F

Built-in Premix: No

Lead Free and Corrosion Resistant

Vandal Resistant: reduces tampering and risk of flooding

Water Saving Up To 85%!

#### WHAT'S INCLUDED

**Shower Panel** 

Push Button Shower Valve

Shower Head

Long Braided Supply Line (36 in)


Allen Wrench For Time Regulation (1.3 mm)

Compression Nut With Brass Ferrule (1/2 in)

Phillips Pan Head Screws With Plastic Anchors (1 1/2 in)

Black Buffer Ring (35x42 mm)







40-160 °F



0.5-6 bar



15 l/min (3 bar)



1/2" MPT



EN 12540, EN 1982, EN 12164, EN 12165, EN 816, ISO 9227 ADA COMPLIANT



15 Year Warranty

KING SUPPLY COMPANY 16 WHITINS RD SUTTON, MA 01590 1 (866) 352-6652 INFO@KINGSUPPLY.COM


SLSHVC-355-SPK



# **DIAGRAM**

Push Button Shower Panels 86mm (Time Adjustable Only)

Concealed self-closing mixer

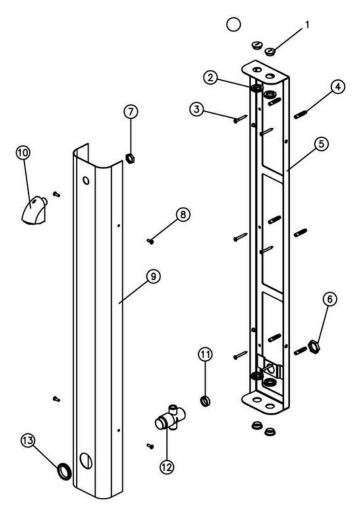

	LIST COMPONENTS	
Pos.	Descrizione	Q.tà
01	PLUG	04
02	RING	04
03	SCREW	06
04	INSERT	06
05	FRAME	01
06	NUT M27x1,5	01
07	NUT G1/2"	01
08	INOX SCREW	04
09	COVER PANEL	01
10	TAP BODY 6000SMALL	01
11	JUNCTION	01
12	SHOWER 9005	01
13	CENTERING RING	01

KING SUPPLY COMPANY 16 WHITINS RD SUTTON, MA 01590 1 (866) 352-6652 INFO@KINGSUPPLY.COM