

SPECIFICATIONS

Push Button Shower Panels 86mm (Time Adjustable Only)
Concealed self-closing mixer

GENERAL INFORMATION

Valve Type: Self Closing Metering Valve
Valve Activation: Manual Push Button Valve
Installation Type: Concealed Wall Mount
Body Material: Lead Free Solid Brass
Finish Type: Stainless Steel

CONNECTIONS & DIMENSIONS


Connection Inlet: 1/2" MPT
Connection Outlet: 1/2" MPT
Panel Width: 5.3" (135mm)
Panel Height: 41.3" (1050mm)

PRODUCT FEATURES

Time Adjustable: No, 30 Seconds
Temperature Adjustable: No
Working Temperature Range: 40 Degrees F - 160 Degrees F
Built-in Premix: No
Lead Free and Corrosion Resistant
Vandal Resistant: reduces tampering and risk of flooding
Water Saving Up To 85%!

WHAT'S INCLUDED

Shower Panel
Push Button Shower Valve
Shower Head
Long Braided Supply Line (36 in)
Allen Wrench For Time Regulation (1.3 mm)
Compression Nut With Brass Ferrule (1/2 in)
Phillips Pan Head Screws With Plastic Anchors (1 1/2 in)
Black Buffer Ring (35x42 mm)

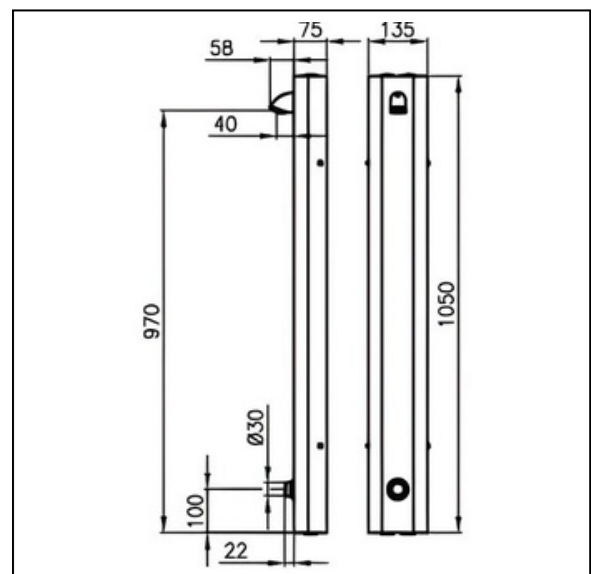

40-160 °F



1/2" MPT



2-4 bar (recommended)

*Installing multiple valves in a row may affect operation depending on supply pressure



EN 12540, EN 1982,
EN 12164, EN 12165,
EN 816, ISO 9227
ADA COMPLIANT



15 l/min (3 bar)




15 Year Warranty



DIAGRAM

Push Button Shower Panels 86mm (Time Adjustable Only)
Concealed self-closing mixer

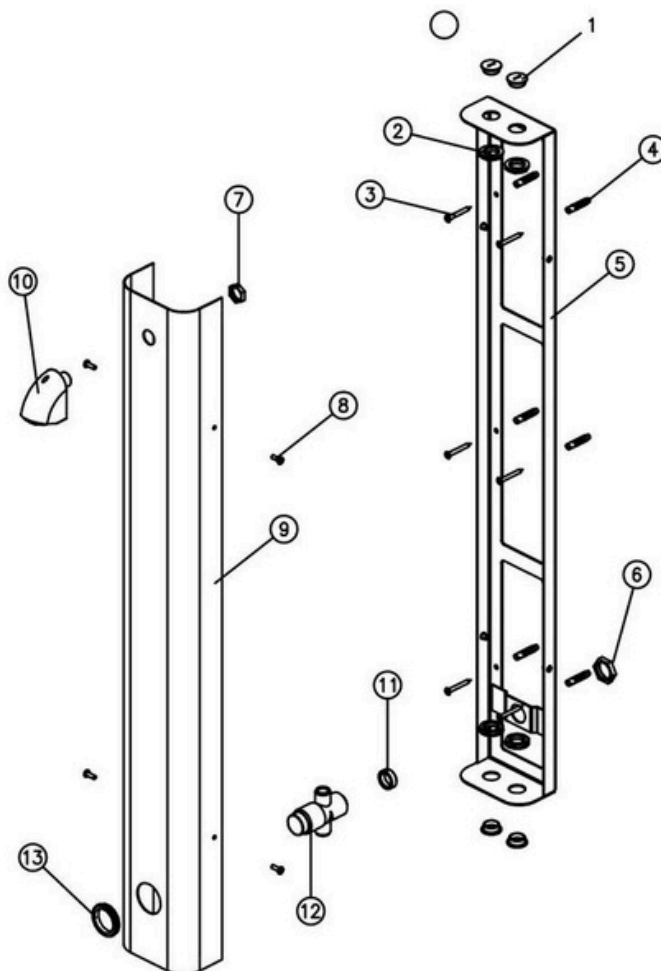

LIST COMPONENTS

Pos.	Descrizione	Q.tà
01	PLUG	04
02	RING	04
03	SCREW	06
04	INSERT	06
05	FRAME	01
06	NUT M27x1,5	01
07	NUT G1/2"	01
08	INOX SCREW	04
09	COVER PANEL	01
10	TAP BODY 6000SMALL	01
11	JUNCTION	01
12	SHOWER 9005	01
13	CENTERING RING	01