



King Supply Co.

1-866-352-6652

SLSHVC-ADJ-SPK-V2

SPECIFICATIONS

Push Button Shower Panel 142mm (Time&Temp Adjustable)

Concealed self-closing mixer

GENERAL INFORMATION

Valve Type: Self Closing Metering Valve
Valve Activation: Manual Push Button Valve
Installation Type: Concealed Wall Mount
Body Material: Lead Free Solid Brass
Finish Type: Stainless Steel

CONNECTIONS & DIMENSIONS


Connection Inlet: 1/2" MPT
Connection Outlet: 1/2" MPT
Panel Width: 7.9" (200mm)
Panel Height: 41.3" (1050mm)

PRODUCT FEATURES

Time Adjustable: Yes, 3-40 Seconds
Temperature Adjustable: Yes
Built-in Premix: Yes
Working Temperature Range: 40 Degrees F - 160 Degrees F
Lead Free and Corrosion Resistant
Vandal Resistant: reduces tampering and risk of flooding
Water Saving Up To 85%!

WHAT'S INCLUDED

Push Button Shower Valve
Shower Panel
Shower Head
Long Braided Supply Line (36 in)
Allen Wrench For Time Regulation (1.3 mm)
Allen Wrench For Screw Installation (3 mm)
Phillips Pan Head Screws With Plastic Anchors (1 1/2 in)
Black Buffer Ring (35x42 mm)
Paper Washer (1/2 in)
Compression Nut With Brass Ferrule (1/2 in)

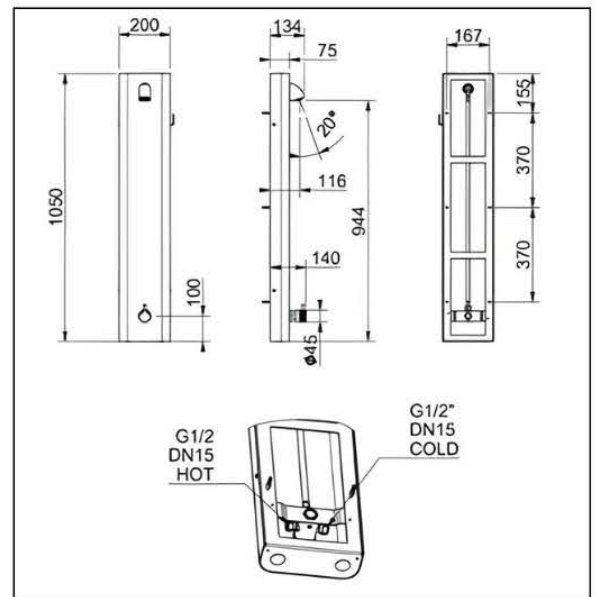

40-160 °F



0.5-6 bar
2-4 bar (Recommended)



15 l/min (3 bar)



1/2" MPT



EN 12540, EN 1982,
EN 12164, EN 12165,
EN 816, ISO 9227
ADA COMPLIANT



15 Year Warranty

KING SUPPLY COMPANY
16 WHITINS RD
SUTTON, MA 01590
1 (866) 352-6652
INFO@KINGSUPPLY.COM

SLSHVC-ADJ-SPK-V2

100% Made in Italy