

SPECIFICATIONS

ADA Lever Operated Shower Valve 203mm
Self-closing lever valve

GENERAL INFORMATION

Valve Type: Self Closing Metering Valve
Valve Activation: Manual Lever Operated Valve
Installation Type: Concealed Wall Mount
Body Material: Lead Free Solid Brass
Finish Type: Chrome Plated Finish

CONNECTIONS & DIMENSIONS



Connection Inlet: 1/2" MPT
Connection Outlet: 1/2" MPT
Rosette Plate Diameter: 2.25" (57mm)
Valve Body Length: 8" (203mm)

PRODUCT FEATURES

Time Adjustable: No, 30 Seconds
Temperature Adjustable: No
Built-in Premix: No
Lead Free and Corrosion Resistant
Vandal Resistant: reduces tampering and risk of flooding
Water Saving Up To 85%!
Working Temperature Range: 40 Degrees F - 160 Degrees F

WHAT'S INCLUDED

Lever Shower Valve
Compression Nuts With Brass Ferrules (1/2 in)
Phillips Pan Head Screws With Plastic Anchors (1 1/2 in)
Rosette Plate (2 1/4 in Diameter)

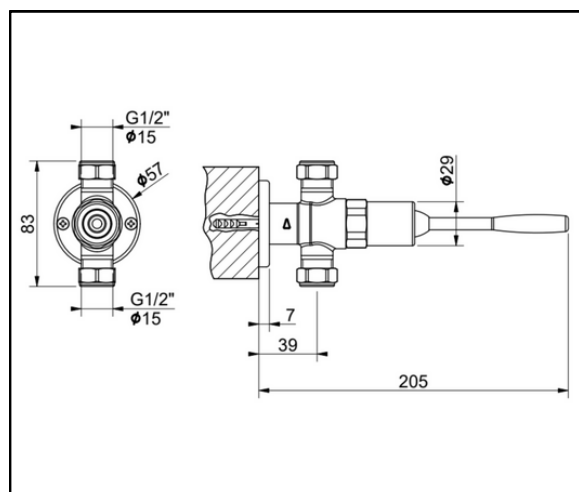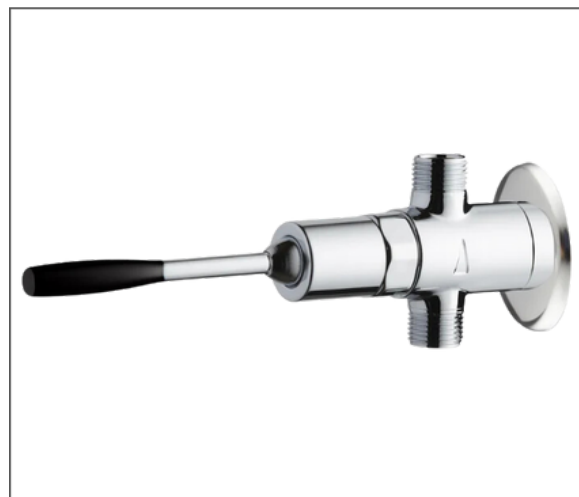

40-160 °F



0.5-6 bar
2-4 bar (Recommended)



15 l/min (3 bar)



1/2" MPT



EN 12540, EN 1982,
EN 12164, EN 12165,
EN 816, ISO 9227
ADA COMPLIANT




15 Year Warranty



DIAGRAM

ADA Lever Operated Shower Valve 203mm

Self-closing lever valve

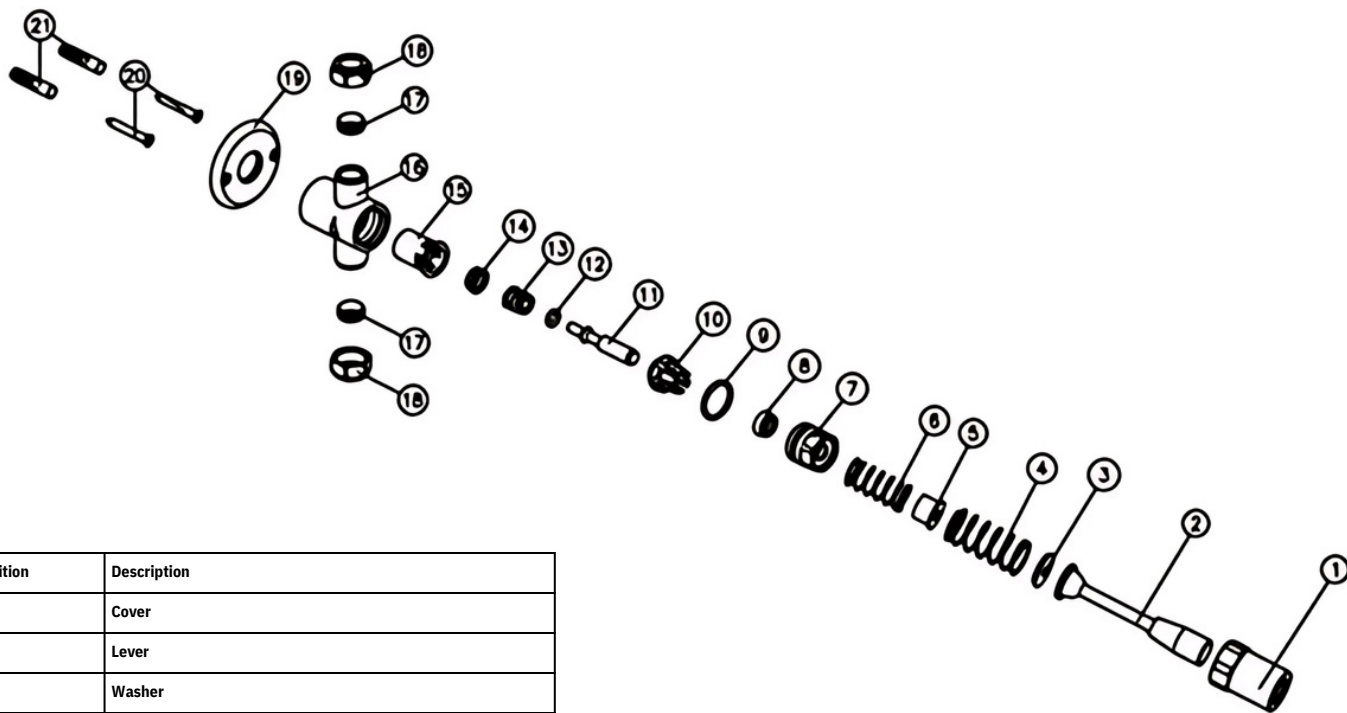

Position	Description
1	Cover
2	Lever
3	Washer
4	Large Spring
5	Button
6	Spring
7	Head Valve
8	Gasket
9	O-Ring
10	Turret
11	Stem
12	O-Ring
13	Valve
14	Gasket
15	Cup
16	Tap Body
17	Ferrule
18	Shell
19	Rosette Plate
20	Fixing Screw
21	Fixing Anchors