



SPECIFICATIONS

Exposed Push Button Shower Valve 86mm (Time Adjustable)

Exposed self-closing valve

GENERAL INFORMATION

Valve Type: Self Closing Metering Valve
Valve Activation: Manual Push Button Valve
Installation Type: Exposed Pipes
Body Material: Lead Free Solid Brass
Finish Type: Chrome Plated Finish

CONNECTIONS & DIMENSIONS


Connection Inlet: 1/2" MPT
Connection Outlet: 1/2" MPT
Valve Body Length: 3 3/8" (86mm)
Rosette Plate Diameter: 2.25" (57mm)

PRODUCT FEATURES

Time Adjustable: Yes, 3-40 Seconds
Temperature Adjustable: No
Working Temperature Range: 40 Degrees F - 160 Degrees F
Built-in Premix: No
Lead Free and Corrosion Resistant
Vandal Resistant: reduces tampering and risk of flooding
Water Saving Up To 85%!

WHAT'S INCLUDED

Push Button Shower Valve
Rosette Plate (2 1/4 in Diameter)
Allen Wrench For Time Regulation (1.3 mm)
Compression Nuts With Brass Ferrules (1/2 in)
Phillips Pan Head Screws With Plastic Anchors (1 1/2 in)

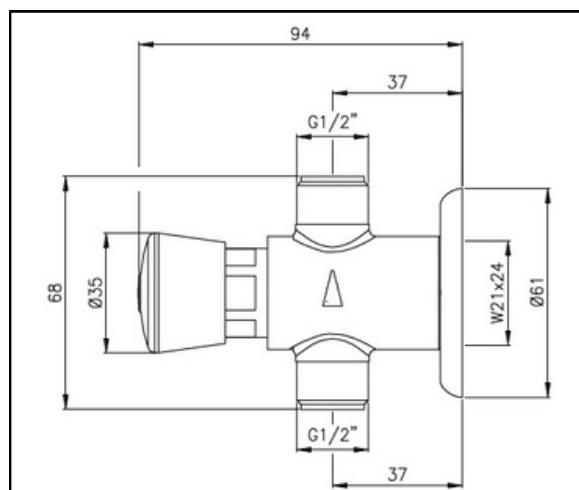

40-160 °F



0.5-6 bar
2-4 bar (Recommended)



10 l/min (3 bar)



1/2" MPT



EN 12540, EN 1982,
EN 12164, EN 12165,
EN 816, ISO 9227
ADA COMPLIANT



15 Year Warranty