

SPECIFICATIONS

Exposed Push Button Shower Valve 120mm (Time & Temp Adjustable)
Exposed self-closing valve

GENERAL INFORMATION

Valve Type: Self Closing Metering Valve
Valve Activation: Manual Push Button Valve
Installation Type: Exposed Pipes
Body Material: Lead Free Solid Brass
Finish Type: Chrome Plated Finish

CONNECTIONS & DIMENSIONS


Connection Inlet: 1/2" MPT
Connection Outlet: 1/2" MPT
Valve Body Length: 4 5/8" (120mm)
Rosette Plate Diameter: 2.25" (57mm)

PRODUCT FEATURES

Time Adjustable: Yes, 3-40 Seconds
Temperature Adjustable: No
Working Temperature Range: 40 Degrees F - 160 Degrees F
Built-in Premix: No
Lead Free and Corrosion Resistant
Vandal Resistant: reduces tampering and risk of flooding
Water Saving Up To 85%!

WHAT'S INCLUDED

Push Button Shower Valve
Rosette Plate (2 1/4 in Diameter)
Allen Wrench For Time Regulation (1.3 mm)
Compression Nuts With Brass Ferrules (1/2 in)
Phillips Pan Head Screws With Plastic Anchors (1 1/2 in)

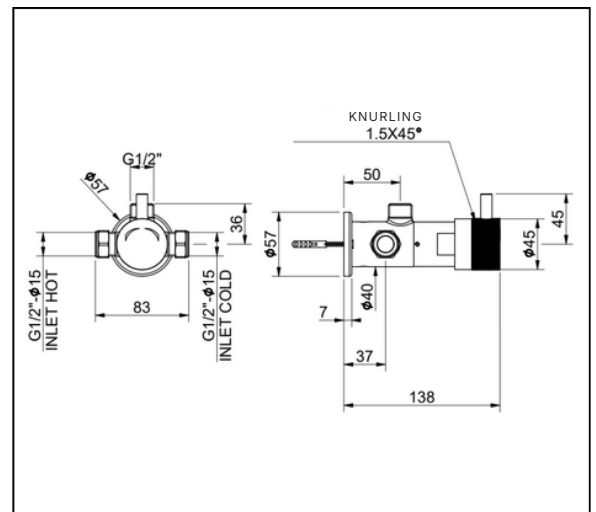

40-160 °F



0.5-6 bar
2-4 bar (Recommended)



10 l/min (3 bar)



1/2" MPT



EN 12540, EN 1982,
EN 12164, EN 12165,
EN 816, ISO 9227
ADA COMPLIANT



15 Year Warranty




DIAGRAM

Exposed Push Button Shower Valve 120mm (Time Adjustable)


Exposed self-closing valve

COMPONENTS LIST

POS.	PART NAME	QTY
1	Ø10 x 60.9 Rod, M10x1 Thread	1
2	Ø10 x 36 Mixer Stem	1
3	Cartridge Cup 9085/6/8 R1	1
4	15 mm PREMIGOVA Cap	2
5	Basket with Filter, 15/25 sec HOSTAFORM	1
6	9085 Mixer Shower Body	1
7	14 x 14 Block	1
8	Spacer for M10x1 Rod, H27.5	1
9	Stainless Steel A2 M5x15 Set Screw, UNI 5923	1
10	Stainless Steel A2 M4x5 Conical Set Screw, UNI 5927	2
11	Flat Filter Gasket, 18.5 x 14.5 x 2.5	2
12	HI/335-GACO Seal, 17.65 x 8.33 x 4.7, SEAP80N01 PEROX	2
13	Kit: 2 Caps / 2 Ø15 Compression Olives	1
14	Kit: 2 Screws + 2 Wall Anchors	1
15	Screen-Printed Handle for 9085 NEW	1
16	Ø40 x 50 Shower Mixer Knob, 9085 NEW	1
17	Axial Spring Ø19.5, H40, 1.3 Wire, 7 Coils	1
18	O-Ring 2100, Ø25.12 x 1.78	1
19	O-Ring 2106, Ø26.7 x 1.78	1
20	O-Ring 2112, Ø28.3 x 1.78	1
21	O-Ring Ø17 x 1.5	1
22	O-Ring Ø20 x 2.5	1
23	O-Ring Ø6 x 2.5	1
24	O-Ring Ø8.5 x 2	2
25	Ø17 Compression Olive, H7, Ø15 Hole	2
26	Standard Brass Valve Plug Assembly with GACO	1
27	Ø15 Valve Plug, H14.5, M6 Hole, GACO Seat	1
28	130 RT Standard Brass Push Button	1
29	Ø57 x 7 Escutcheon, W21x24 Thread, Chrome-Plated	1
30	Tower for Standard Valve Headwork	1
31	DN15 Check Valve	2
32	Stainless Steel A2 M4x8 Countersunk Hex Socket Screw, UNI 5933	2
33	Ø26 MARC Standard Brass Valve Headwork Assembly with GACO & O-Ring	1
34	W26x19 Valve Headwork, H23.5	1

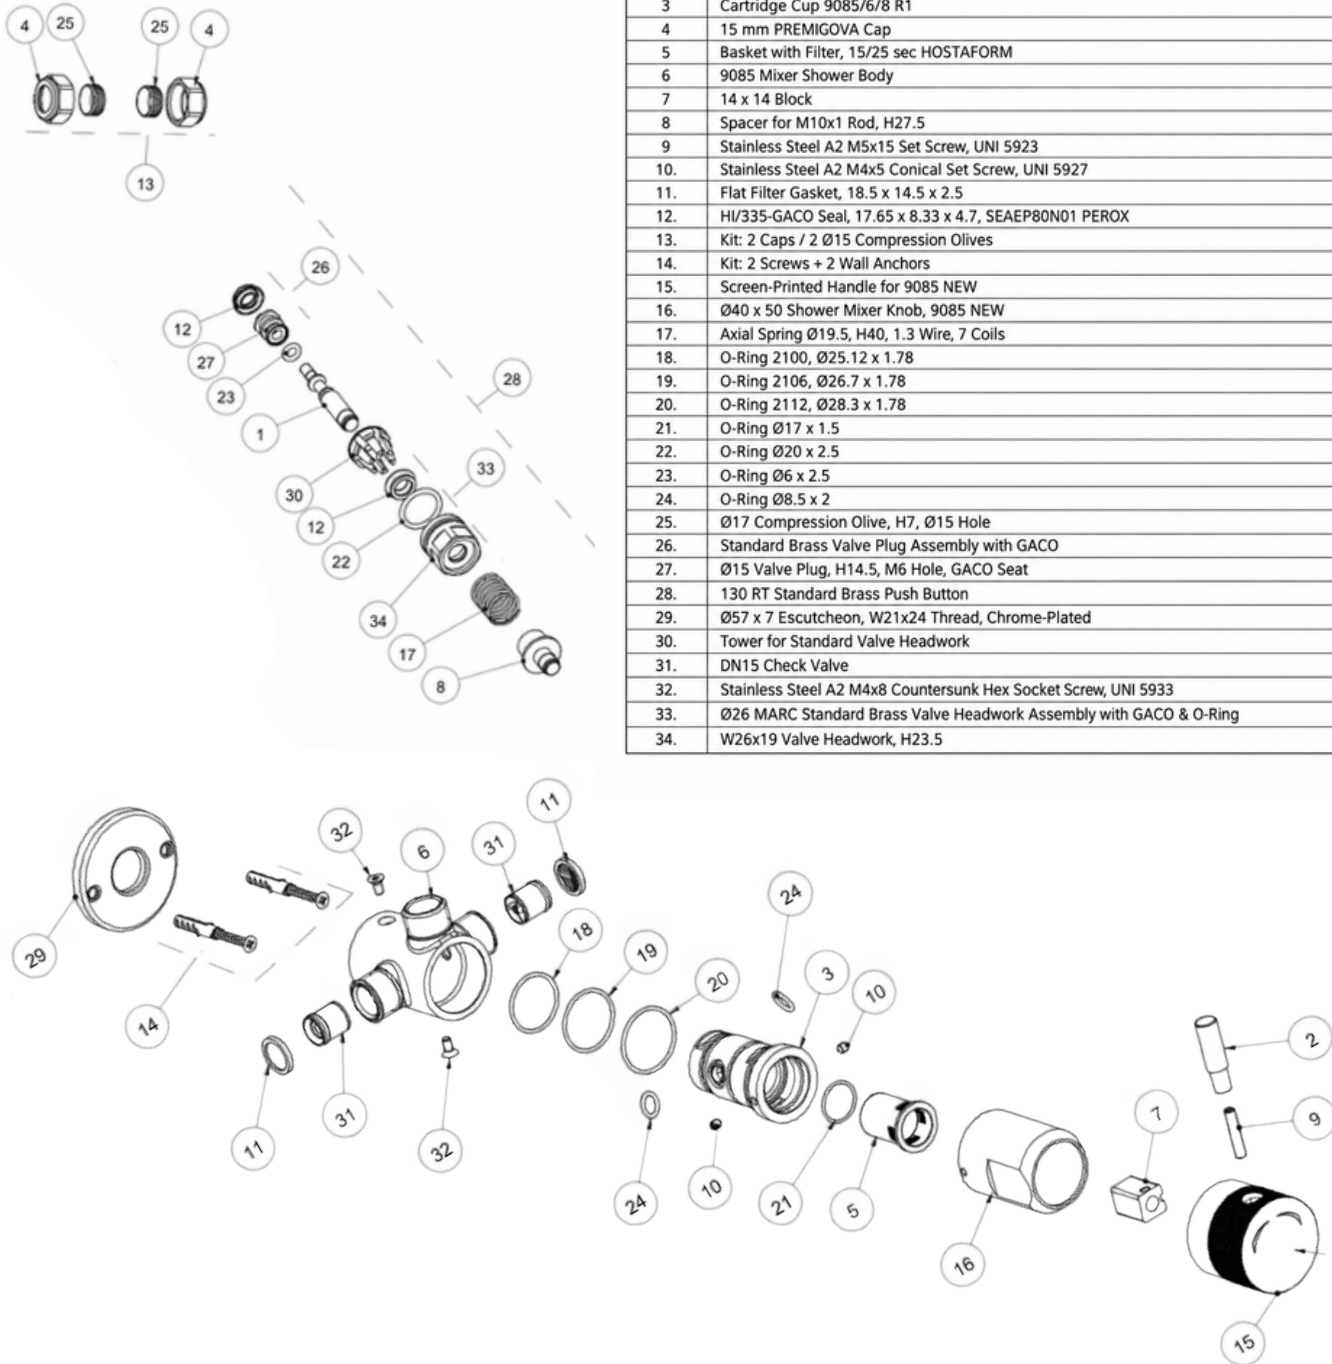

SCHEDA COMPONENTI				
POS.	DESCRIPTION	FILE NAME	MATERIAL	QTY
1	ASTA D10 X 60,9 FIL M10X1 TRN	AST000440009TRN	CW617N-UNI-EN-12164	1
2	ASTINA MIX D10X36 CRM	AST027650001CRM	CW617N-UNI-EN-12164	1
3	BICCHIERE P/CART 9085/6/8 R1 TRN	BIC0018101009TRN	CW617N-UNI-EN-12164	1
4	CALOTTA PREMIOGIVA 15MM	MIN016220009NKL	CW617N-UNI-EN-12164	2
5	CESTELLO (4) CON FILTRO 15/25 SEC HOSTAFORM	CPL016490039STP	HOSTAFORM CW617N-	1
6	CORPO DOCCIA MIX 9085 TRN	CRP001770009TRN	UNI-EN-12165 CW617N-	1
7	CUBOTTO 14x14	MIN027580009TRN	UNI-EN-12164 CW617N-	1
8	DISTANZ RT PER ASTA M10X1 H27,5 TORNITO	MIN027640000TRN	UNI-EN-12165 AISI304	1
9	Grano inox A2 M6x15 UNI 5923	VIT027600025STP	AISI304	1
10	GRANO P/CONICA INOX A2 M4X5 UNI 5927	VIT004430025STP	EPDM	2
11	Guarnizione filtro piatta 18.5X14.5X2.5	GUP012250053STP	SEAE80	2
12	HI/335-GACO PICC 17,65 X 8,33 X 4,7 SEAE80N01 PEROX	GUS016090056STP	-	2
13	KIT 2 CALOTTE / 2 OGIVE D15	2SC00010006XX	NO-MATERIAL	1
14	Kit 2 Viti + 2 tasselli	2KT00080006XX	CW617N-UNI-EN-12164	1
15	MANIGLIA SERIGRAFATA PER 9085 NEW CRM	MAN027590009CRM	CW617N-UNI-EN-12164	1
16	MANOPOLA D40 X 50 MIX DOCCIA 9085 NEW CRM	MAN027570009CRM	AISI302	1
17	MOLLA ASSIALE D19,5 H40 FILO1,3 7 SPIRE	MOL002160025AVL	EPDM	1
18	O-ring 2100 Ø25.12x1.78	GOR002920051STP	EPDM	1
19	O-ring 2106 Ø26.7x1.78	GOR002880051STP	EPDM	1
20	O-ring 2112 Ø28.3x1.78	GOR002820053STP	EPDM	1
21	O-ring Ø17x1.5	GOR002170051STP	EPDM	1
22	O-ring Ø20x2.5	GOR002640051STP	EPDM	1
23	O-ring Ø6x2.5	GOR002120051STP	NBR CW617N-UNI-EN-	1
24	O-ring Ø8,5x2	GOR002790050STP	12164	2
25	OGIVA D17 H7 FORO 15 TRN	MIN004890009TRN		2
26	OTTUR ASS OT STD GRZ C/GACO	2OT00010001GR		1
27	OTTUR D15 H14,5 FORO M6 SEDE GACO TRN	MIN016050009TRN	CW617N-UNI-EN-12164	1
28	PULSANTE 130 RT OT STD CRM	2PS01070001GR		1
29	ROSONE D 57 X 7 FIL W21X24 LAM CROMATO	PTR017410003CRM	CW508LEN-12449	1
30	Torretta per vitone standard	CPL016550039STP	POM_HOSTAFOR	1
31	VALVOLA NON RITORNO DN15	VNR005210049STP	M POM-C	2
32	Vite TSEI inox A2 M4X8 UNI 5933	VIT000140025TRN	AISI304	2
33	VITONE D26 MARC ASS OT STD C/GACO E ORING CRM	2VIT00010001CR		1
34	VITONE W26X19 H23,5 C/DATA TRN	MIN003550000TRN	CW617N-UNI-EN-12165	1

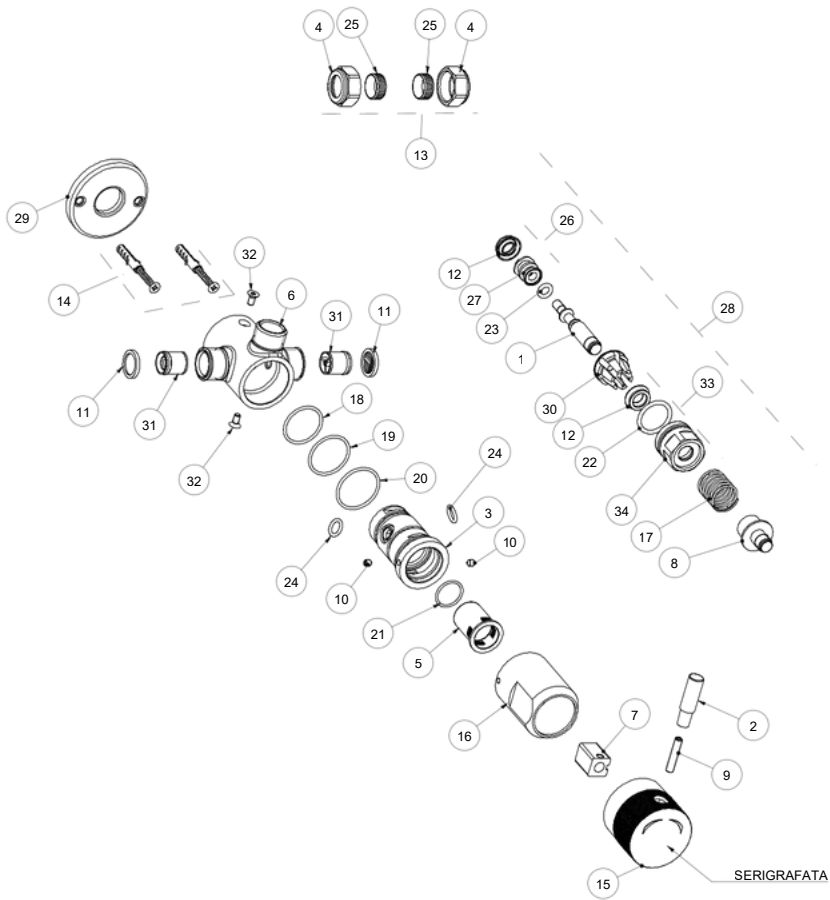

	DOCCIA 9086 NEW		0	Formato / Format A3	
	DOCESTTEMP9086STANDARDCRM15/25/REV.1		Dis. 1908600R01CR00000		
	MCM srl Via dell'acacia 54-56 - 28021 - Borgomanero (NO) - Tel. +39 0322 843060 www.mcmtaps.it				
	Il presente disegno a termine di legge non può essere reso pubblico o riprodotto senza l'autorizzazione scritta di mcm srl				