



SPECIFICATIONS

Exposed Push Button Shower Valve 86mm (Time Adjustable)

Exposed self-closing valve

GENERAL INFORMATION

Valve Type: Self Closing Metering Valve
Valve Activation: Manual Push Button Valve
Installation Type: Exposed Pipes
Body Material: Lead Free Solid Brass
Finish Type: Chrome Plated Finish

CONNECTIONS & DIMENSIONS


Connection Inlet: 1/2" MPT
Connection Outlet: 1/2" MPT
Valve Body Length: 3 3/8" (86mm)
Rosette Plate Diameter: 2.25" (57mm)

PRODUCT FEATURES

Time Adjustable: Yes, 3-40 Seconds
Temperature Adjustable: No
Working Temperature Range: 40 Degrees F - 160 Degrees F
Built-in Premix: No
Lead Free and Corrosion Resistant
Vandal Resistant: reduces tampering and risk of flooding
Water Saving Up To 85%!

WHAT'S INCLUDED

Push Button Shower Valve
Rosette Plate (2 1/4 in Diameter)
Allen Wrench For Time Regulation (1.3 mm)
Compression Nuts With Brass Ferrules (1/2 in)
Phillips Pan Head Screws With Plastic Anchors (1 1/2 in)

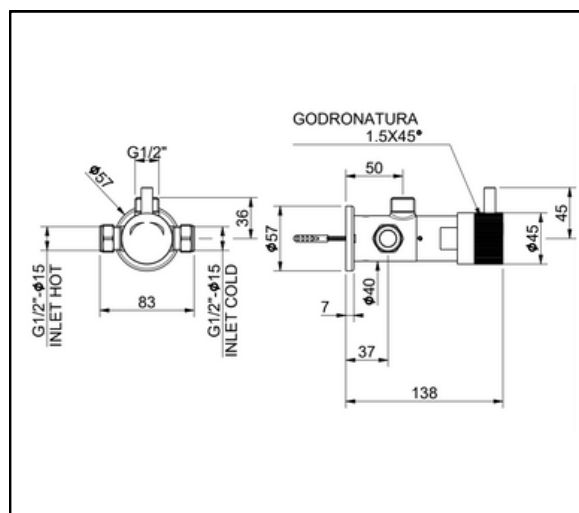

40-160 °F



0.5-6 bar
2-4 bar (Recommended)



10 l/min (3 bar)



1/2" MPT



EN 12540, EN 1982,
EN 12164, EN 12165,
EN 816, ISO 9227
ADA COMPLIANT




15 Year Warranty



DIAGRAM

Exposed Push Button Shower Valve 86mm (Time Adjustable)

Exposed self-closing valve

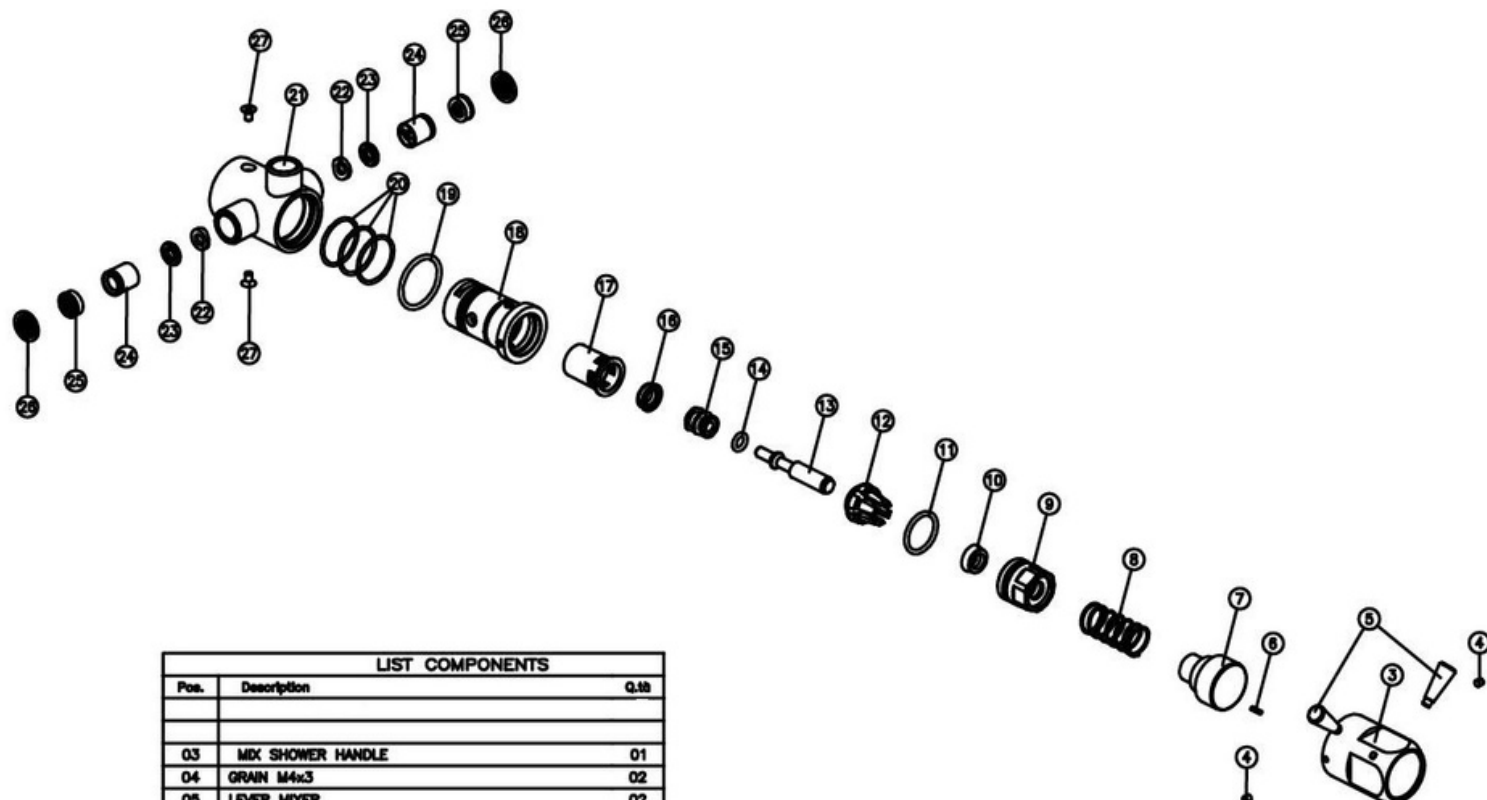

LIST COMPONENTS		
Pos.	Description	Q.tà
03	MIX SHOWER HANDLE	01
04	GRAIN M4x3	02
05	LEVER MIXER	02
06	GRAIN	01
07	PUSH BUTTON	01
08	SPRING	01
09	HEAD VALVE Ø28 H.23,5 ES.24	01
10	GASKET	01
11	O-RING Ø20x2,5 OZONO	01
12	TURRET FOR VITONE	01
13	STEM Ø10 H.80	01
14	O-RING Ø6x2,5 NBR 70 Sh	01
15	VALVE Ø15 H.14,5 ES.14	01
16	GASKET Ø 7,8x8,7x4,7 EX707-250	01
17	CUP	01
18	TAP BODY	01
19	O-RING Ø20,30x2,62 NBR 70 Sh	01
20	O-RING Ø28,7x1,78 NBR 70 Sh	03
21	BODY	01
22	BUSH FOR SHOWER MIX	02
23	PREMIXED SHOWER WASHER FOR SHOWER MIX	02
24	NON-RETURN VALVE	02
25	FLOW REDUCER	02
26	FILTRE	02
27	SCREW	02